



PRODUCT DATA SHEET


ATLANTIC LONG LIFE INHIBITOR

Product Description:

Atlantic Long Life Inhibitor is a blend of organic acid carboxylates corrosion inhibitors with anti-foaming agents and anti-scale compounds formulated to provide excellent corrosion and anti-freeze/anti-boil protection for modern cooling systems. It contains no silicates, borates, phosphates, nitrites, nitrates or amines and is suitable for use in a wide variety of vehicles and machinery including cars, light & heavy commercial vehicles, motorcycles, construction, industrial and stationary engines cooling system. Atlantic Long Life Inhibitor is a Type B corrosion inhibitor and can be used where Type A antifreeze coolants are not applicable.

Features and Benefits:

- Passenger vehicles and light commercial vehicles - 250,000km/ 5 years (whichever comes first).
- Heavy duty vehicles 600,000km/ 4 years/ 12,000 hours (whichever comes first).
- Organic Acid Technology (OAT)
- Provides optimum protection of all metals commonly used in cooling systems.
- Blended with Anti-foam agents to prevent water pump cavitation.
- Maximises operating life and reliability of water pumps.
- Excellent anti-freeze/ anti-boil protection against metals corrosion, cavitation and liner pitting.
- Protects against scale, rust and residue buildup.
- Tested and manufactured in Australia for Australian conditions.

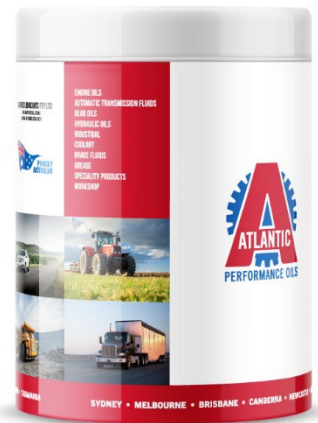

Notes and Handling:

Its recommended that Atlantic Long Life Inhibitor be used as a straight water base inhibitor at 10% treat rate (1 litre per 10 litres of water) and as low as 4% in demineralized water.

Do not mixed with any other inhibitors or coolants.

For best results, flush cooling system prior to refilling with Atlantic Long Life Inhibitor.

Always dispose of used inhibitors in accordance with state regulations.

Never top up with water as this will dilute the inhibitor. Always top up with Atlantic Long Life Inhibitor premixed at the correct ratio.

ATLANTIC LUBRICANTS PTY LTD ABN 67 088 335 059

HEAD OFFICE - SYDNEY

40 Liverpool St Ingleburn, NSW 2565
P: (02) 9829 7555

atlanticoil.com

VICTORIA

P: (03) 9768 3307

NEWCASTLE

P: (02) 4964 8436

ACT

P: 0411 094 945

QUEENSLAND

P: (07) 3556 1235

NORTHERN TERRITORY

P: 0429 771 810

TASMANIA

P: (03) 6423 4900



PRODUCT DATA SHEET

PACK SIZE	GREEN PRODUCT CODE	RED PRODUCT CODE
20 Litre	LLIG0002	LLIR0002
205 Litre	LLIG0004	LLIR0004
1000 Litre	LLIG0005	LLIR0005

Specifications/ Performance Levels:

- ASTM D1881
- ASTM D4340
- ASTM D2570
- Caterpillar Marine Power System
- Detroit Diesel/Perkins
- Isuzu truck
- Mack-RVI
- Mercedes-Benz truck
- Navistar
- Subaru
- Volkswagen
- Yanmar
- ASTM D1384
- ASTM D2809
- ASTM D3634
- Daihatsu
- Honda
- Liebherr MD1-36-130
- MAN Diesel Engines
- MTU (MTL 5049)
- SAAB
- Sulzer Diesel
- Volvo



All recommendations for the use of our products, whether given by us in writing, verbally, or to be implied from the results of tests carried out by us, are based on the current state of our knowledge. Notwithstanding any such recommendations the Buyer shall remain responsible for satisfying himself that the products as supplied by us are suitable for his intended process or purpose. Since we cannot control the application, use or processing of the products, we cannot accept responsibility, therefore. The Buyer shall ensure that the intended use of the products will not infringe any third party's intellectual property rights. We warrant that our products are free from defects in accordance with and subject to our general conditions of supply.

Copyright © 2024 Atlantic Lubricants Pty Ltd. All rights reserved.

7 November 2023

ATLANTIC LUBRICANTS PTY LTD ABN 67 088 335 059

HEAD OFFICE - SYDNEY

40 Liverpool St Ingleburn, NSW 2565
P: (02) 9829 7555

atlanticoil.com

VICTORIA

P: (03) 9768 3307

NEWCASTLE

P: (02) 4964 8436

ACT

P: 0411 094 945

QUEENSLAND

P: (07) 3556 1235

NORTHERN TERRITORY

P: 0429 771 810

TASMANIA

P: (03) 6423 4900