



# PRODUCT DATA SHEET


## ATLANTIC ROCK DRILL OIL

### Product Description:

For use in Mining, quarrying, constructions, road works, tunneling and excavations. Consist of selected mineral oils specially compounded with lubricity fortifiers, corrosion inhibitors, emulsifiers and tackiness additives. Recommended for the following well-known companies including Gardner-Denver, Atlas Copco and SIG.

### Features and Benefits:

- High film strength.
- Ability to absorb excess water when 'wet air' or wet drilling attachments are present.
- Provide a suitable seal between piston and cylinder.
- Reduced wear, helps maintain maximum percussion efficiency and allows operation in conditions of high or low temperatures.
- Preferentially adhere to metal surfaces and resist blow-off.
- Improved protection against wear caused by poor lubrication.
- Thermal stability allows it to be used in high temperature applications

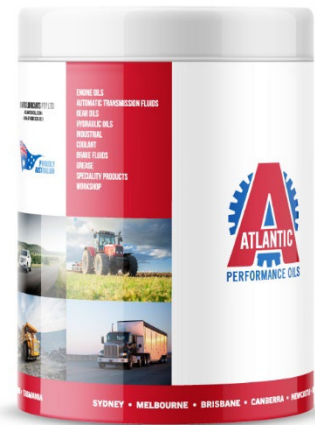

### Typical Data:

Test Description	Units	ISO 100	ISO 150	ISO 320
Density @ 15°C	kg/L	0.878	0.89	0.90
Viscosity, Kinematic @ 40°C	cSt	110	150	320
Viscosity, Kinematic @100°C	cSt	11	14.7	24.1
Viscosity Index	-	94	97	96

### Grades:

- ISO 100, 150, 320

PACK SIZE	ISO 100 Product Code	ISO 150 Product Code	ISO 320 Product Code
5 Litre	ROC10001	ROC15001	ROC32001
20 Litre	ROC10002	ROC15002	ROC32002
205 Litre	ROC10004	ROC15004	ROC32004

All recommendations for the use of our products, whether given by us in writing, verbally, or to be implied from the results of tests carried out by us, are based on the current state of our knowledge. Notwithstanding any such recommendations the Buyer shall remain responsible for satisfying himself that the products as supplied by us are suitable for his intended process or purpose. Since we cannot control the application, use or processing of the products, we cannot accept responsibility, therefore. The Buyer shall ensure that the intended use of the products will not infringe any third party's intellectual property rights. We warrant that our products are free from defects in accordance with and subject to our general conditions of supply.

Copyright © 2024 Atlantic Lubricants Pty Ltd. All rights reserved.

7 November 2023

**ATLANTIC LUBRICANTS PTY LTD** ABN 67 088 335 059

#### HEAD OFFICE - SYDNEY

40 Liverpool St Ingleburn, NSW 2565  
P: (02) 9829 7555

[atlanticoil.com](http://atlanticoil.com)

#### VICTORIA

P: (03) 9768 3307

#### NEWCASTLE

P: (02) 4964 8436

#### ACT

P: 0411 094 945

#### QUEENSLAND

P: (07) 3556 1235

#### NORTHERN TERRITORY

P: 0429 771 810

#### TASMANIA

P: (03) 6423 4900