



# PRODUCT DATA SHEET


## ATLANTIC SUPER TRANS MP FARM OIL STOU

### Product Description:

Atlantic Super Trans MP Farm Oil is a high performance SAE 15W-40 multigrade engine oil designed specifically to lubricate and protect the typical range of equipment found on Australian farms. Atlantic Super Trans MP Farm Oil is recommended for mixed fleet farming operations, ensuring high levels of protection to American, European and Japanese powered machinery. Applications include all tractor types, combine harvesters, crop sprayers, some construction equipment and materials handling equipment.

### Features and Benefits:

- Oxidative and thermal stability
- Wide machinery coverage
- Provides outstanding wear and friction control
- Proven protection for engines, transmissions, hydraulics final drives, wet brakes & power steering
- Broad range seal compatibility
- PTO compatibility

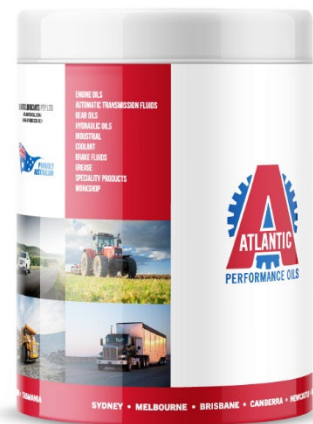

### Typical Data:

Test Description	Method	Units	Results
Colour	Visual	-	Amber
Density @ 15°C	ASTM D 4052	kg/L	0.883
Viscosity, Kinematic @ 40°C	ASTM D 445	cSt	113
Viscosity, Kinematic @100°C	ASTM D 445	cSt	15.2
Viscosity Index	ASTM D 2270	-	141
Pour Point	ASTM D 97	°C.	-30
Flash point	ASTM D 93	°C.	220

**ATLANTIC LUBRICANTS PTY LTD** ABN 67 088 335 059

#### HEAD OFFICE - SYDNEY

40 Liverpool St Ingleburn, NSW 2565  
P: (02) 9829 7555

[atlanticoil.com](http://atlanticoil.com)

#### VICTORIA

P: (03) 9768 3307

#### NEWCASTLE

P: (02) 4964 8436

#### ACT

P: 0411 094 945

#### QUEENSLAND

P: (07) 3556 1235

#### NORTHERN TERRITORY

P: 0429 771 810

#### TASMANIA

P: (03) 6423 4900



# PRODUCT DATA SHEET

## Specifications/ Performance Levels:

- **SAE Viscosity:** 15W-40
- **ACEA:** E3
- **API:** CG4, CF-4, CF, CE/SF
- **API:** GL-4
- **Allison:** C4
- **CAT:** TO-2
- **Ford:** ESN-M2C159-B
- **John Deere:** JDM J27
- **MAN:** 271
- **Massey Ferguson:** CMS M1139, M1144, M1145
- **Mercedes Benz:** 227.1, 228.1, 228.3
- **MIL-L-2104D**
- **ZF:** TE-ML 06B/ 06C/ 06D/ 07B

PACK SIZE	PRODUCT CODE
20 Litre	FST15402
60 Litre	FST15403
205 Litre	FST15404
1000 Litre	FST15405



All recommendations for the use of our products, whether given by us in writing, verbally, or to be implied from the results of tests carried out by us, are based on the current state of our knowledge. Notwithstanding any such recommendations the Buyer shall remain responsible for satisfying himself that the products as supplied by us are suitable for his intended process or purpose. Since we cannot control the application, use or processing of the products, we cannot accept responsibility, therefore. The Buyer shall ensure that the intended use of the products will not infringe any third party's intellectual property rights. We warrant that our products are free from defects in accordance with and subject to our general conditions of supply.

Copyright © 2024 Atlantic Lubricants Pty Ltd. All rights reserved.

7 November 2023

**ATLANTIC LUBRICANTS PTY LTD** ABN 67 088 335 059

**HEAD OFFICE - SYDNEY**  
40 Liverpool St Ingleburn, NSW 2565  
P: (02) 9829 7555

[atlanticoil.com](http://atlanticoil.com)

**VICTORIA**  
P: (03) 9768 3307

**NEWCASTLE**  
P: (02) 4964 8436

**ACT**  
P: 0411 094 945

**QUEENSLAND**  
P: (07) 3556 1235

**NORTHERN TERRITORY**  
P: 0429 771 810

**TASMANIA**  
P: (03) 6423 4900