



PRODUCT DATA SHEET

ATLANTIC GEAREX ZF-SYN AMT 75W-80


Product Description:

Atlantic Gearex ZF-SYN 75W-80 is a synthetic technology, high performance transmission fluid, developed for use in ZF manual and automated manual transmission (AMT) systems. The product not only offers a high level of component protection under a wide range of operating conditions and loads, but improved gear shift and improvements in fuel economy.

Gearex ZF-SYN 75W-80 can be used in ZF manual and automated manual transmission (AMT) systems fitted to commercial vehicles, light commercial vehicles, coaches and buses, or where one or more of the specifications below is listed. The versatility of Gearex ZF-SYN 75W-80 allows it to be used in any other types of transmission system requiring an API GL4 lubricant of this viscosity grade.

Features and Benefits:

- Improved gear shift performance
- Proven performance for synchronizers
- Protects components under high load conditions
- Improved transmission efficiency with potential fuel savings
- High temperature stability during sustained long distance schedules
- Extended drain intervals up to 300,000 km.

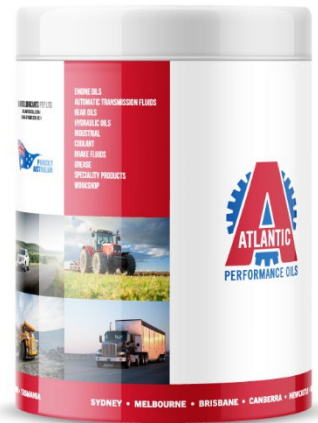

Typical Data:

Test Description	Method	Units	Results
Appearance	Visual	-	Clear and Bright
Density @ 15°C	ASTM D 4052	kg/L	0.857
Viscosity, Kinematic @ 40°C	ASTM D 445	cSt	56.0
Viscosity, Kinematic @100°C	ASTM D 445	cSt	9.5
Viscosity Index	ASTM D 2270	-	154
Pour Point	ASTM D 97	°C	< -48
Brookfield Viscosity @ -40°C	ASTM D 2983	cP	79980

ATLANTIC LUBRICANTS PTY LTD ABN 67 088 335 059

HEAD OFFICE - SYDNEY

40 Liverpool St Ingleburn, NSW 2565
P: (02) 9829 7555

atlanticoil.com

VICTORIA

P: (03) 9768 3307

NEWCASTLE

P: (02) 4964 8436

ACT

P: 0411 094 945

QUEENSLAND

P: (07) 3556 1235

NORTHERN TERRITORY

P: 0429 771 810

TASMANIA

P: (03) 6423 4900



PRODUCT DATA SHEET

PACK SIZE	PRODUCT CODE
20 Litre	AGZ75802
60 Litre	AGZ75803
205 Litre	AGZ75804



Specifications/ Performance Levels:

- **SAE Viscosity:** 75W-80
- **API:** GL-4
- **DAF**
- **Eaton**
- **Iveco**
- **MAN:** 341 Z-4/ 341 E3
- **Mercedes Benz:** 235.4
- **Renault**
- **Volvo:** 97305, 97307
- **ZF:** TE-ML 01L, 02L, 08, 13, 16K, 24A



All recommendations for the use of our products, whether given by us in writing, verbally, or to be implied from the results of tests carried out by us, are based on the current state of our knowledge. Notwithstanding any such recommendations the Buyer shall remain responsible for satisfying himself that the products as supplied by us are suitable for his intended process or purpose. Since we cannot control the application, use or processing of the products, we cannot accept responsibility, therefore. The Buyer shall ensure that the intended use of the products will not infringe any third party's intellectual property rights. We warrant that our products are free from defects in accordance with and subject to our general conditions of supply.

Copyright © 2022 Atlantic Lubricants Pty Ltd. All rights reserved.

8 June 2022

ATLANTIC LUBRICANTS PTY LTD ABN 67 088 335 059

HEAD OFFICE - SYDNEY
40 Liverpool St Ingleburn, NSW 2565
P: (02) 9829 7555

atlanticoil.com

VICTORIA
P: (03) 9768 3307

NEWCASTLE
P: (02) 4964 8436

ACT
P: 0411 094 945

QUEENSLAND
P: (07) 3556 1235

NORTHERN TERRITORY
P: 0429 771 810

TASMANIA
P: (03) 6423 4900